




## GOLD PLUS II

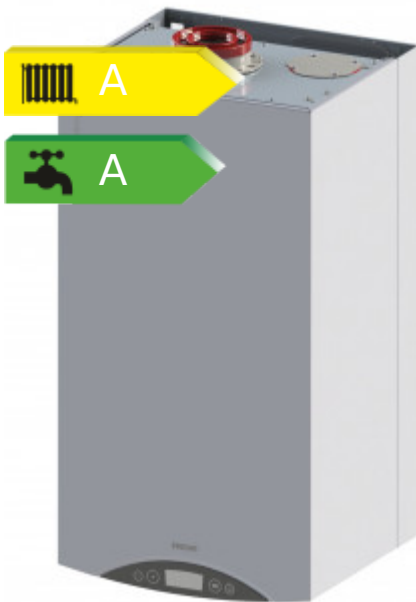

Taking care of our customers, we are constantly developing our products, which is why the new **GOLD PLUS II** boiler has been introduced to our offer, which is a refreshed version of the ECOCONDENS GOLD PLUS condensing boiler. Necessary improvements have been introduced that have a significant impact on energy savings, efficiency, quality and, above all, comfort of use. In the new version of the boiler, which is characterized by a coil made of stainless steel in the form of a single coil, which affects even more reliable and economical operation of the device. The boiler has an expansion vessel on the side of the device, which allows quick access from the front of the device, which greatly facilitates servicing. **GOLD PLUS II** is extremely user-friendly not only for the user, but also thanks to its easy and convenient installation for the installer and service technician.

- energy class: A
- control via the Internet - ability to manage the temperature in the room using a smartphone or tablet using the Termet Comfort System package
- use of the latest generation of stainless steel heat exchanger with a single coil
- extremely wide power modulation range: from 17% to 100%
- highly efficient circulation pump
- fan with smooth speed control (electronically controlled)
- low NOx stainless steel cylindrical burner (class 6)
- hydraulic group in the form of a hydroblock mounted on quick connectors
- complete security system
- Open-Therm communication system using the CR11011 controller
- possibility of working with multi-zone modules for heating systems
- possibility of cooperation with air/water heat pumps

# Accessories

Basic package "Comfort System"



Image not found or type unknown

TERMET ST-292 V2



TERMET ST-292 V3



OUTSIDE TEMPERATURE SENSOR



## parameters

## Value

Thermal power (at temp. 80/60°C)	3,3 - 19,1 kW
Thermal power (at temp. 50/30°C)	3,7 - 21,0 kW
Heat load	3,4 - 19,5 kW
Seasonal space heating energy efficiency $\eta_s$	96,1 %
Efficiency of the boiler at nominal load and average boiler water temperature of 70°C	98,0 %
Efficiency of the boiler at partial load and return water temperature of 30°C	108,0 %
Seasonal space heating energy efficiency class	A
Useful heat output at rated thermal power P4 (for modulated boilers - arithmetic mean of min and max)	19,1 kW
Useful heat output at 30% of rated power P1 (for modulated boilers - 30% of arithmetic mean)	6,3 kW
Efficiency $\eta_4$	90,4 %
Efficiency $\eta_1$	100,0 %
Max water pressure	3 bar
Max CH temperature	95 °C
Standard adjustable temperature	40 - 80 °C
Reduced adjustable temperature	25 - 55 °C
Pump head at 0 flow	0,6 bar
Nominal boiler thermal power (at temperature 80/60°C)	3,3 - 19,1 kW
Nominal heat load	3,4 - 19,5 kW
Efficiency of the boiler at nominal load and average boiler water temperature of 70°C	98,0 %
Water pressure	0,1 - 6,0 bar
Minimal water flow	2,0 dm <sup>3</sup> /min
Domestic water flow at $\Delta t=30K$	9 dm <sup>3</sup> /min
Energy efficiency class of water heating	A
Load profile	L
Range of water temperature regulation	30 - 60 °C
Sound power level LWA	48 dB
Emission of nitrogen dioxide	33 mg/kWh
Emission class of nitrogen dioxide (NOx)	6
Standby mode power consumption PSB	0,002 kW
Electricity consumption at full load elmax	0,066 kW
Electricity consumption at partial load elmax	0,054 kW
Type and supply voltage	~ 230 $\pm$ 10%/ 50Hz V
Protection degree	IPX4D
Heating water and gas connection	G3/4 inch
Dimensions	793 x 400 x 310 mm
Weight	36,2 kg
Domestic water connection	G1/2 inch
Exchanger material	INOX steel