




UNICO ELEGANCE

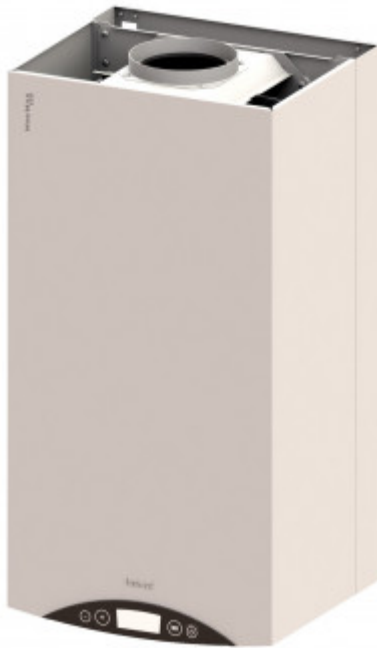

UNICO ELEGANCE gas boilers with open combustion chamber are dedicated to central heating systems (as independent unit). The boilers are also adjusted to work with DHW cylinders. Modern and uncomplicated control panel allows the user for easy operation and gives full control on device operation.

- multifunction control panel with digital display which reads all boiler functions and error codes
- work with DHW cylinder by built-in three-way valve
- possibility of DHW temperature regulation in cylinder directly from boiler control panel
- electronic thermos-manometer
- very compact dimensions
- adjustment to different types of gas
- high protection degree IP-44
- weather regulation function
- electronic ignition with ionization flame control
- soft ignition function
- complete protection system
- anti-legionella function (in option)
- possibility of connecting the mixing module

parameters	Value
Thermal power (at temp. 80/60°C)	4,0 - 13,5 kW
Heat load	4,5 - 14,8 kW
Efficiency of the boiler at rated power	91,4 %
Efficiency of the boiler at minimal power	90,4 %
Max water pressure	3 bar
Max CH temperature	95 °C
Standard adjustable temperature	40-85 °C
Reduced adjustable temperature	35-55 °C
Pump head at 0 flow	0,6 bar
Emission class of nitrogen dioxide (NOx)	3
Expansion vessel capacity	6 dm ³
Type and supply voltage	~230±10%/50Hz V
Protection degree	IP 44
Heating water and gas connection	G3/4 inch
Dimensions	700 x 360 x 300 mm
Weight	23,0 kg
Flue connection (internal diameter)	110 mm