





## SOLID COMFORT

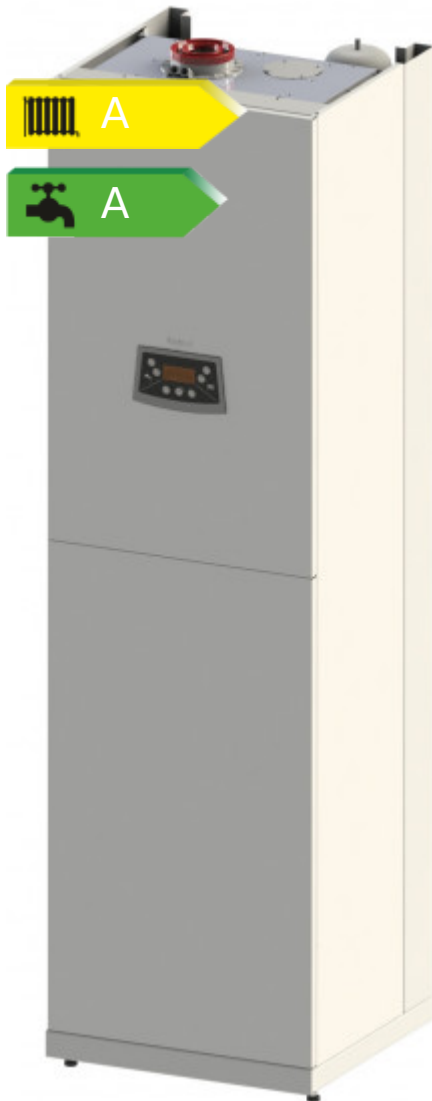

ECOCONDENS SOLID PLUS is a ready-to-connect heating unit in a single, compact and aesthetically designed casing. The unit consists of: the latest generation condensing boiler combined with a 107-litre storage tank made entirely of stainless steel, expansion vessels for domestic hot water and central heating as well as a modern boiler control system that enables a.o. remote operation via smartphone or tablet by an individual customer and remote monitoring of the boiler by service technician.

- energy class: A
- heat exchanger made of stainless steel
- wide range of modulation: from 11% to 100%
- high efficiency circulation pump
- stepless speed regulation fan (controlled electronically)
- cylinder burner made of stainless steel □ low level of NOx emission (5th class)
- complete protection system
- optimization of boiler operation is possible due to application of:
  - outdoor temperature sensor
- temperature regulator: ON/OFF, Open-Therm or 0-10V,
- ROUND system for remote boiler control via smartphone,
- EVOHOME system for remote control of up to 11 heating zones
- ready-to-use multi-zone modules for controlling up to 3 SIM heating systems
- boilers can also cooperate with:
  - heat pumps air/water
  - solar panels

Akcesoria

Basic package "Comfort System"



Image not found or type unknown

TERMET ST-292 V2



TERMET ST-292 V3



OUTSIDE TEMPERATURE SENSOR



<b>Parametry</b>	<b>Wartość</b>
Thermal power (at temp. 80/60°C)	2,7-20,0 kW
Thermal power (at temp. 50/30°C)	3,0-22,0 kW
Heat load	2,8-20,4 kW
Seasonal space heating energy efficiency $\eta_s$	93 %
Efficiency of the boiler at nominal load and average boiler water temperature of 70°C	97,6 %
Efficiency of the boiler at partial load and return water temperature of 30°C	107,9 %
Seasonal space heating energy efficiency class	A
Useful heat output at rated thermal power P4 (for modulated boilers - arithmetic mean of min and max)	20,1 kW
Useful heat output at 30% of rated power P1 (for modulated boilers - 30% of arithmetic mean)	6,6 kW
Efficiency $\eta_4$	87,8 %
Efficiency $\eta_1$	98,0 %
Max water pressure	3 bar
Max CH temperature	95 °C
Standard adjustable temperature	40-80 °C
Reduced adjustable temperature	25-55 °C
Pump head at 0 flow	0,7 bar
Nominal boiler thermal power (at temperature 80/60°C)	2,7-25,0 kW
Nominal heat load	2,8-25,6 kW
Efficiency of the boiler at nominal load and average boiler water temperature of 70°C	97,6 %
Water pressure	0,1-6,0 bar
Minimal water flow	2,7 dm <sup>3</sup> /min
Domestic water flow at $\Delta t=30K$	12,4 dm <sup>3</sup> /min
Energy efficiency class of water heating	A
Load profile	L
Range of water temperature regulation	30-60 °C
Sound power level LWA	44 dB
Emission of nitrogen dioxide	21 mg/kWh
Emission class of nitrogen dioxide (NOx)	6
Expansion vessel capacity	8 dm <sup>3</sup>
Standby mode power consumption PSB	0,005 kW
Electricity consumption at full load $e_{max}$	0,07 kW
Electricity consumption at partial load $e_{max}$	0,05 kW
Type and supply voltage	~ 230 $\pm$ 10%/ 50Hz V
Protection degree	IPX4D
Heating water and gas connection	G3/4 inch
Dimensions	1869x520x490 mm
Weight	94 kg
Domestic water connection	G1/2 inch
Exchanger material	stainless steel
Coil power	30 kW
Cylinder position	vertical
Cylinder capacity	107 dm <sup>3</sup>
Coil capacity	5 dm <sup>3</sup>